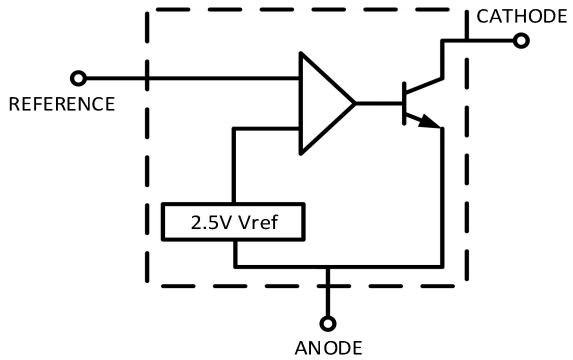


GT431A/GT432A Precision Programmable Reference

| 1 Features | 2 Application |
|---|---|
| <ul style="list-style-type: none"> - Reference voltage tolerance 0.5% at 25°C - Programmable output voltage to 36V - Low dynamic output impedance 0.2Ω - Sink current capability of 1mA to 100mA - Equivalent full-range temperature coefficient of 50ppm/°C maximum - Temperature compensated for operation over full rated operating temperature range - Low output noise voltage - Fast turn on response - Operation from -40°C to 125°C - Lead-Free packages: SOT23 | <ul style="list-style-type: none"> - Adjustable voltage and current referencing - Power supply - Zener replacement - Voltage monitoring - Comparator with integrated reference - As precision voltage reference |

| 3 Description | Circuit Diagram |
|--|--|
| <p>The GT431A and GT432A device are three-terminal adjustable shunt regulators, with a guaranteed thermal stability over applicable temperature ranges. The output voltage can be set to any value between VREF (approximately 2.5V) and 36V with two external resistors. These devices provide a very sharp turn-on characteristic, making these devices excellent replacement for Zener diodes in many applications. Both the GT431A and GT432A devices are specified with an initial tolerance of 0.5% at 25°C.</p> |  |

4 Device Summary, Pin and Packages

Table. 4-1. Device Summary⁽¹⁾

| Serial Name | Part Name | Package | Body Size (Nom) | Marking ⁽²⁾ | MSL ⁽³⁾ | Package Qty |
|-------------|-----------|----------|----------------------|------------------------|--------------------|--------------------|
| GT431A | GT431AS3 | SOT23(3) | 2.90mm×1.30mm×1.10mm | GT431A XXXX | 3 | Tape and Reel,3000 |
| GT432A | GT432AS3 | SOT23(3) | 2.90mm×1.30mm×1.10mm | GT432A XXXX | 3 | Tape and Reel,3000 |

(1) For all available packages, please contact product sales.

(2) There may be additional marking, which relates to the lot trace code information (data code and vendor code), the logo or the environmental category on the device.

(3) MSL, The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications.

(4) "XXXXX" in Marking will be appeared as the batch code.

4 Device Summary, Pin and Packages(Continued)

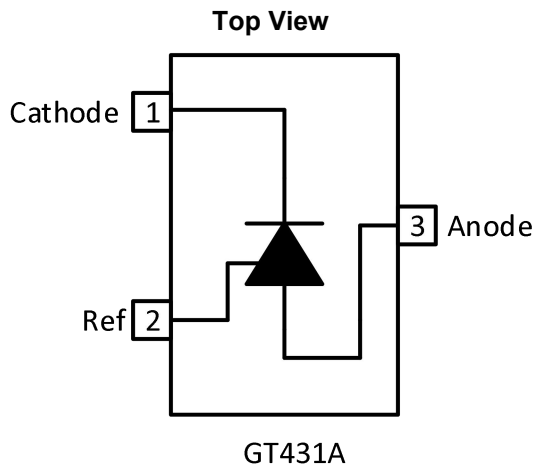


Fig.4-1. GT431A: SOT23(3) Package

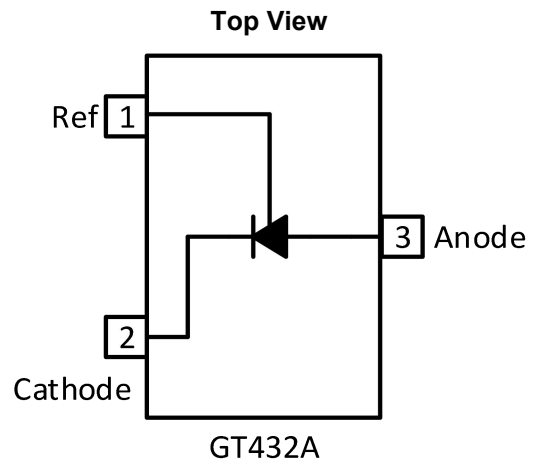


Fig.4-2. GT432A: SOT23(3) Package

Table. 4-2. Pin Definition

| Name | Pin | | I/O | Description |
|---------|--------|--------|-----|--|
| | GT431A | GT432A | | |
| Cathode | 1 | 2 | I | Shunt Current/Voltage input |
| Ref | 2 | 1 | O | Threshold relative to common anode |
| Anode | 3 | 3 | - | Common pin, normally connected to ground |

* It is suggested to leave the unconnected pins floating.

5 Voltage, Temperature, ESD and Thermal Ratings

5.1 Absolute Maximum Ratings^{(1) (2)}

| Parameters | Symbol | Min. | Max. | Unit |
|-----------------------------------|-----------|-------|------|------|
| Cathode Voltage | V_{KA} | -0.3 | 40 | V |
| Cathode Current Range(Continuous) | I_{KA} | -100 | +150 | mA |
| Reference Input Current Range | I_{REF} | -0.05 | +10 | mA |
| Operating temperature | T_{opr} | -40 | +125 | °C |
| Power Dissipation | P_D | 370 | | mW |
| Storage temperature | T_{stg} | -65 | 150 | °C |

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicate under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) All voltages are with respect to the GND pin.

5.2 ESD Ratings

| ESD | | Value | Unit | |
|--------|-------------------------|----------------------------|------|---|
| V(ESD) | Electrostatic discharge | Human-Body Model (HBM) | 2500 | V |
| | | Charged-Device Model (CDM) | 400 | V |

5.3 Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted)

| Symbol | Parameters | Min. | Max. | Unit |
|--------|-------------------------------------|------|------|------|
| VKA | Cathode Voltage | VREF | 36 | V |
| IKA | Cathode Current Range(Continuous) | 1 | 100 | mA |
| TA | Operating Ambient Temperature Range | -40 | +125 | °C |

5.4 Thermal Information

| THERMAL METRIC | | GT431A/GT432A | Unit |
|----------------------|--|---------------|------|
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 185.6 | °C/W |
| $R_{\theta JC(top)}$ | Junction-to-case(top) thermal resistance | 104.3 | °C/W |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 54.5 | °C/W |
| ψ_{JT} | Junction-to-top characterization parameter | 31.0 | °C/W |
| ψ_{JB} | Junction-to-board characterization parameter | 54.5 | °C/W |
| $R_{JC(bot)}$ | Junction-to-case(bottom) thermal resistance | N/A | °C/W |

6 Electrical Specifications

Over recommended operating conditions, FULL=-40°C to +125°C, Typical values are at TA=+25°C. (unless otherwise noted)

| Parameters | Symbol | Conditions | | Min. | Typ. | Max. | Unit |
|---|----------------------------------|--|----------------------------------|-------|-------|-------|----------|
| Reference Input Voltage | V_{REF} | $V_{KA}=V_{REF}, I_{KA}=10mA$ | 0.5% | 2.488 | 2.500 | 2.513 | V |
| Deviation of reference Input Voltage Over temperature | ΔV_{REF} | $V_{KA}=V_{REF}, I_{KA}=10mA$ $T_{min} \leq T_A \leq T_{max}$ | | - | 7 | 20 | mV |
| Ratio of Change in Reference Input Voltage to the Change In Cathode Voltage | $\Delta V_{REF} / \Delta V_{KA}$ | $I_{KA}=10mA$ | $\Delta V_{KA}=10V$ to V_{REF} | - | -1.0 | -2.7 | mV/V |
| | | | $\Delta V_{KA}=36V$ to 10V | - | -0.5 | -2.0 | |
| Reference Input Current | I_{REF} | $I_{KA}=10mA, R1=10k\Omega, R2=\infty$ | | - | 2 | 4 | μA |
| Deviation of Reference Input Current Over Full Temperature Range | $\Delta I_{REF} / \Delta T_A$ | $I_{KA}=10mA, R1=10k\Omega, R2=\infty$ $T_A=full$ Temperature | | - | 0.4 | 1.2 | μA |
| Minimum cathode current for regulation | $I_{KA}(min)$ | $V_{KA}=V_{REF}$ | | - | 0.4 | 1.0 | mA |
| Off-state cathode Current | $I_{KA}(OFF)$ | $V_{KA}=36V, V_{REF}=0V$ | | - | 0.05 | 1.0 | μA |
| Dynamic Impedance | Z_{KA} | $V_{KA}=V_{REF}, I_{KA}=1$ to 100mA $f \leq 1.0KHz$ | | - | 0.2 | 0.5 | Ω |

7 Typical Characteristics

(Over recommended operating conditions, FULL=−40°C to +125°C, Typical values are at TA=+25°C, unless otherwise noted)

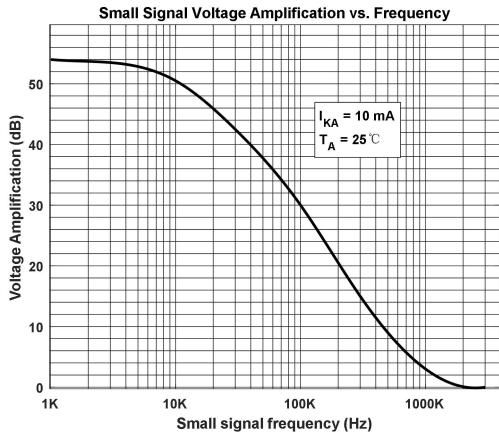


Fig.7-1. Small signal frequency response

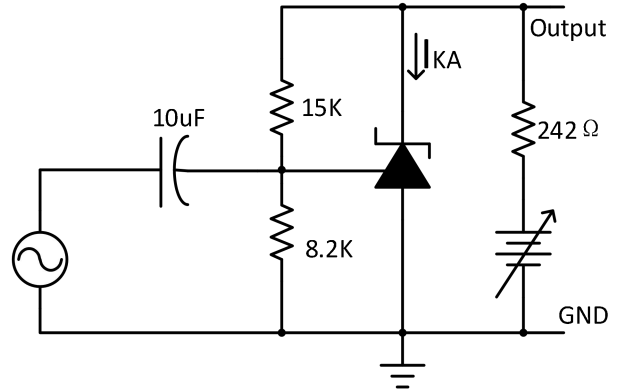


Fig.7-2. Small signal frequency response test circuit

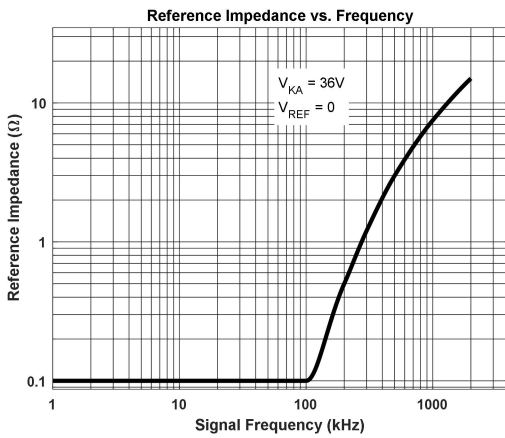


Fig.7-3. Reference impedance

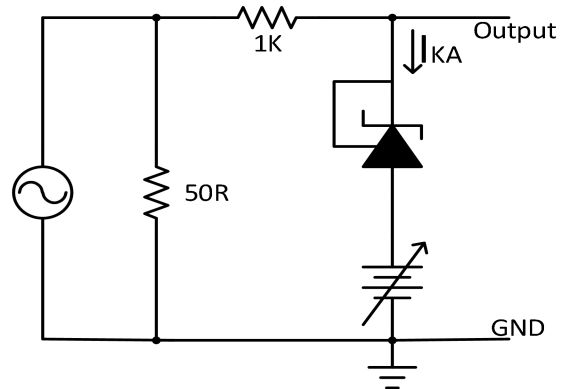


Fig.7-4. Reference impedance test circuit

7 Typical Characteristics(Continued)

(Over recommended operating conditions, FULL=−40°C to +125°C, Typical values are at TA=+25°C, unless otherwise noted)

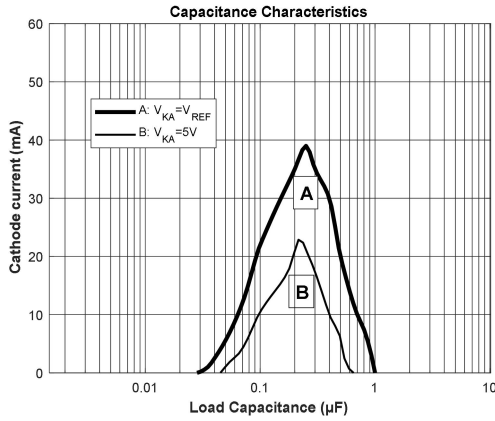


Fig.7-5. Capacitance characteristics

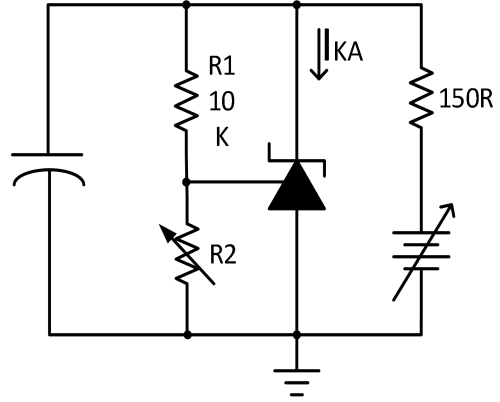


Fig.7-6. Capacitance characteristics test circuit

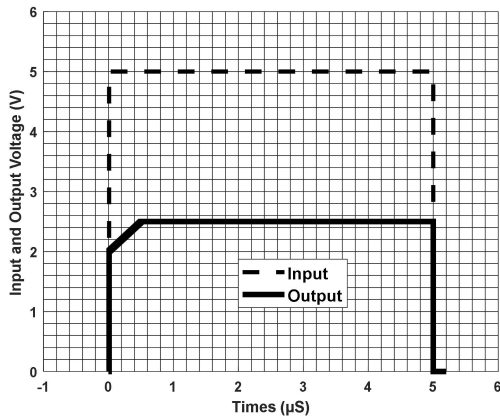


Fig.7-7. Power-on and power-off response

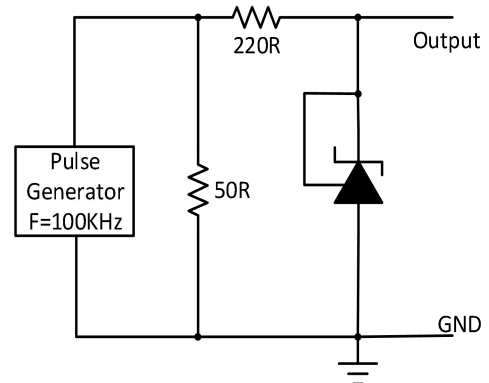


Fig.7-8. Power-on and power-off response test circuit

8 Detailed Description

8.1 Overview

This standard component has been widely adopted in various applications, from power supplies to signal paths. It integrates crucial elements, such as a precision voltage reference and an operational amplifier, which are essential analog building blocks. When combined with its key components, the GT431A/GT432A family can be set up as a standalone voltage reference, error amplifier, voltage clamp, or comparator with an integrated reference.

8.2 Feature Description

The GT431A/GT432A can operate with cathode voltages adjustable within a range of 2.5V to 36V. It is optimized for end-equipment applications in industrial, automotive, telecommunications, and computing systems. When used as a shunt regulator or error amplifier, a minimum cathode current greater than 1 mA ($I_{min(max)}$) must be ensured. In these configurations, the feedback between the cathode and reference pins allows the replication of the internal reference voltage. The operating temperature range of the GT431A/GT432A device is from -40°C to 125°C .

9 Application Note

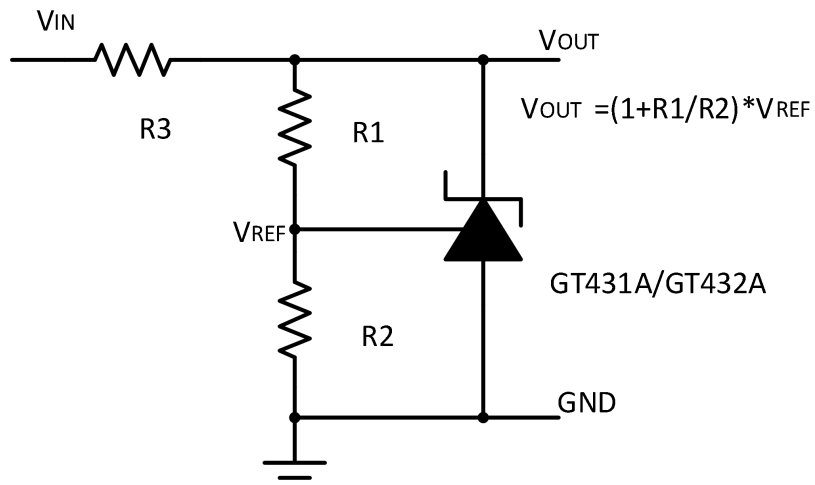


Fig.9-1. Shunt Regulator

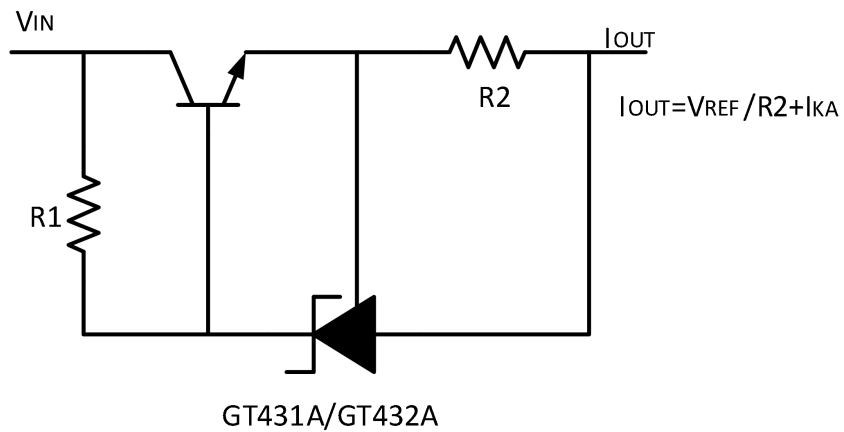


Fig. 9-2. Current Source or Current Limit

9 Application Note(Continued)

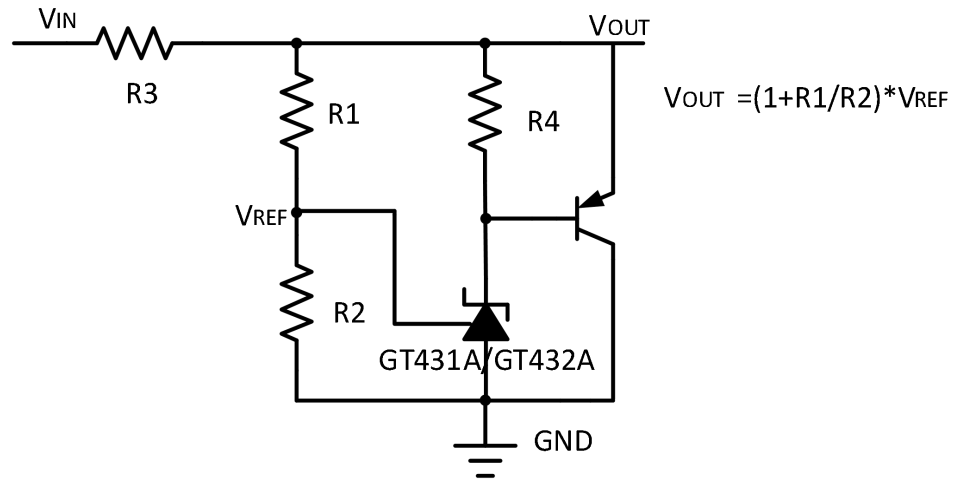


Fig.9-3. High Current Shunt Regulator




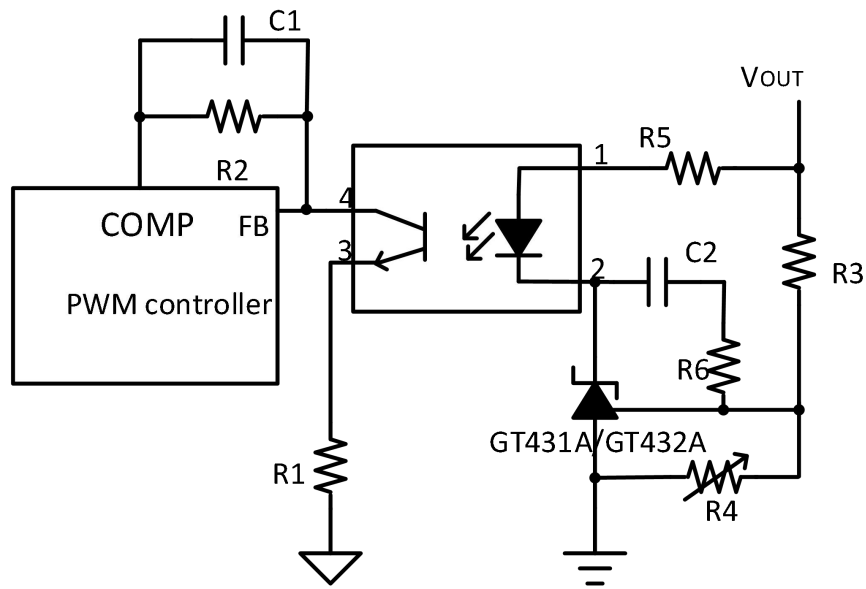


Fig.9-4. PWM Converter with Reference

10 Package Outline Dimension


SOT23-3

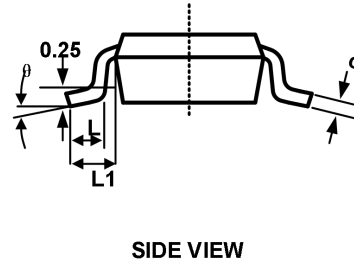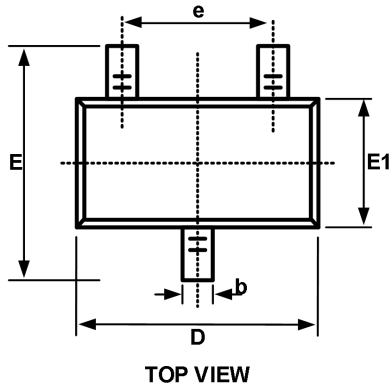

Recommended Land Pattern (Unit: mm)

| Symbol | Dimensions in Millimeters | | Dimensions in Inches | |
|----------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.900 | 1.100 | 0.035 | 0.043 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.132 | 0.202 | 0.005 | 0.008 |
| D | 2.800 | 3.000 | 0.110 | 0.118 |
| E | 2.250 | 2.550 | 0.089 | 0.100 |
| E1 | 1.200 | 1.400 | 0.047 | 0.055 |
| e | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.300 | 0.500 | 0.012 | 0.020 |
| L1 | 0.550 REF | | 0.022 REF | |
| θ | 0° | 8° | 0° | 8° |

11 Tape and Reel Information

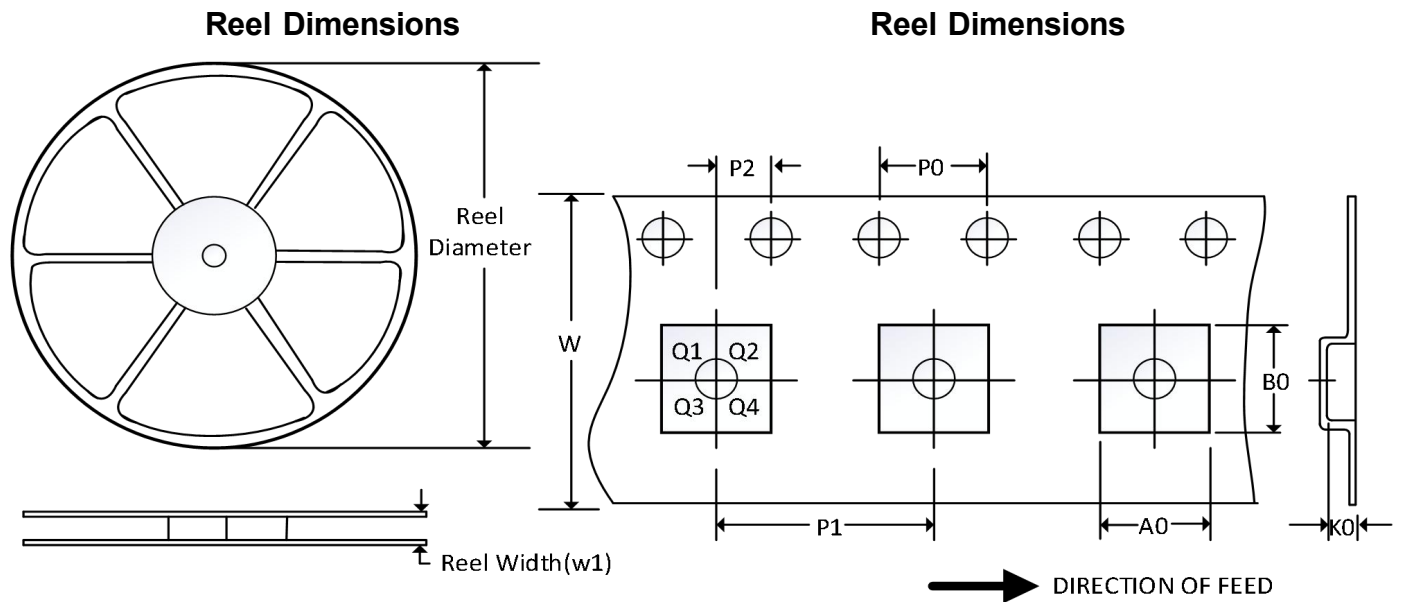

NOTE: The picture is only for reference. Please make the object as the standard.

Key Parameter List of Tape and Reel

| Package Type | Reel Diameter | Reel Width (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|--------------|---------------|-----------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| SOT23-3 | 7" | 9.5 | 3.20 | 3.20 | 1.40 | 4.0 | 4.0 | 2.0 | 8.0 | Q3 |

NOTE:

1. All dimensions are nominal.
2. Plastic or metal protrusions of 0.15mm maximum per side are not included.